

# LOCCA

StayOS by LOCCA



## Smart Hotel & Residential Solution

StayOS by LOCCA Parts&Products

# 2026

# WHOLE-HOUSE SMART



Tuya Smart



WIFI/Zigbee



Timing Switch



Smart Induction



Remote Control



Voice Control



Tempered Glass



Smart Linkage



Dual Control  
& Multi-control



Power Consumption  
Statistics



Remote Monitoring



Remote Alarm

# Smart Door Control Series

## Hotel Series

| MODEL NO: LOC-HLML100                                                            |                                                                                   |                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour :                                                                         | BLACK                                                                             | Product Description                                                                                                                                                                                                                                                                                                                                                     |
|  |  | <b>1.Material:</b> Alumium Alloy<br><b>2.Color:</b> Black<br><b>3.Door Thickness:</b> 35-110mm<br><b>4.Capacity:</b> 200 Users<br><b>5.Unlock Way:</b> Fingerprint+Password+IC Card+Mechanical Key+Tuya app<br><b>6.Support System:</b> iOS 7.0 or above, Android 4.4<br><b>7.Battery Life:</b> 12000times (18 Months or above)<br><b>8.Battery:</b> 8 Pcs AA batteries |

| MODEL NO: LOC-HLML200                                                             |                                                                                    |                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour :                                                                          | BLACK                                                                              | Product Description                                                                                                                                                                                                                                                                                                                                                     |
|  |  | <b>1.Material:</b> Alumium Alloy<br><b>2.Color:</b> Black<br><b>3.Door Thickness:</b> 35-110mm<br><b>4.Capacity:</b> 200 Users<br><b>5.Unlock Way:</b> Fingerprint+Password+IC Card+Mechanical Key+Tuya app<br><b>6.Support System:</b> iOS 7.0 or above, Android 4.4<br><b>7.Battery Life:</b> 12000times (18 Months or above)<br><b>8.Battery:</b> 8 Pcs AA batteries |

## Residential Series

| MODEL NO: LOC-RLW10                                                                |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour :                                                                           | BLACK/GOLD/SILVER                                                                   | Product Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|  |  | <b>1.Material:</b> Alumium Alloy<br><b>2.Color:</b> Black,gold, silver<br><b>3.Door Thickness:</b> 35-110mm<br><b>4.Capacity:</b> 300 Users<br><b>5.Unlock Way:</b> 3D Face recognition+Palm+Fingerprint+ Password+IC Card+Mechanical Key+Tuya app<br><b>6.Support System:</b> iOS 7.0 or above, Android 4.4<br><b>7.Battery Life:</b> 12000times (18 Months or above)<br><b>8.Battery:</b> 1PC 4200 mAh lithium battery<br><b>9.Languages:</b> English, Russian, Vietnamese, Korean, Arabic, Portuguese, French, Spanish, Indonesian, Thai, Hebrew, Turkish, Italian, Mongolian, Uzbek, -Kazakh, Serbian, Persian<br><b>10.Waterproof:</b> waterproof<br><b>11.Features:</b> Active intercom |

| MODEL NO: LOC-RLHP2                                                                |                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Colour :                                                                           | BLACK/GOLD/SILVER                                                                   | Product Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|  |  | <b>1.Material:</b> Alumium Alloy<br><b>2.Color:</b> Black,gold, silve,bluer<br><b>3.Door Thickness:</b> 35-110mm<br><b>4.Capacity:</b> 300 Users<br><b>5.Unlock Way:</b> 3D Face recognition+Palm+Fingerprint+ Password+IC Card+Mechanical Key+Tuya app<br><b>6.Support System:</b> iOS 7.0 or above, Android 4.4<br><b>7.Battery Life:</b> 12000times (18 Months or above)<br><b>8.Battery:</b> 1PC 4200 mAh lithium battery<br><b>9.Languages:</b> English, Russian, Vietnamese, Korean, Arabic, Portuguese, French, Spanish, Indonesian, Thai, Hebrew, Turkish, Italian, Mongolian, Uzbek, -Kazakh, Serbian, Persian<br><b>10.Waterproof:</b> waterproof<br><b>11.Features:</b> Active intercom |

# Smart Central Control Panel Series

## I Smart Central Control Panel 8PRO

- Input: 100-240VAC, 50/60Hz
- Wireless Protocol: Wi-Fi 2.4GHz & 5GHz, Bluetooth, Zigbee
- Operating Temperature: 0~40°C
- Operating Humidity: 5%-90%RH (Non-condensing)
- Display Screen: 8-inch touch screen, 1280\*800 Resolution
- Dimensions: 127.5\*233.5\*38mm



### Product Features

Equipped with independent Zigbee and Bluetooth chips, integrated with Zigbee and Bluetooth gateway functions. It supports Bluetooth BLE & BLE Mesh sub-devices and features edge computing capability for local control. It provides abundant access entries for device and scene control with diverse control methods, compatible with most types of smart devices.



## I 10.1-inch High Resolution Large Screen

- Input: 100-240VAC, 50/60Hz
- Wireless Protocol: Wi-Fi 2.4GHz & 5GHz, Bluetooth, Zigbee
- Operating Temperature: 0~40°C
- Operating Humidity: 5%-90%RH (Non-condensing)
- Display: 10.1-inch FHD touch screen, 1920\*1200 Resolution
- Dimensions: 259\*161\*37mm (including base)

### Product Features

Customizable buttons for quick panel control and multi-device control on one screen. Adopting Tuya's innovative T-Control technology, it supports customized linked devices, scenes, volume and more. Realizes multi-device centralized control via a single screen.

## I Multifunctional Central Control Panel

Wireless Protocol: Wi-Fi, Bluetooth, Zigbee  
Wireless Standard: IEEE 802.11b/g/n, IEEE 802.15.4, Low Energy Bluetooth 4.2/5.0  
Network Settings: WLAN settings, Ethernet settings  
Screen Size: 3.5 inch, 4 inch, 5 inch, 7 inch



3.5 inch



4 inch



7 inch



5 inch

| 10-inch Android Smart control                                                     |                                      | F10-Tuya | Specification parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------|--------------------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specifications                                                                    | Music+ Smart Control+Gateway + Scene |          | <p>Bluetooth transmission and reception: choose one of two options. (1. Bluetooth transmission: can search for the Bluetooth speaker through the host's Bluetooth and connect to it. The music on the host can be played through the Bluetooth speaker. 2. Bluetooth reception: can search for the host through the phone's Bluetooth and connect to it. The music on the phone can be played through the external speaker.)</p> <ul style="list-style-type: none"><li>•Android 11system, RAM 2G, Rom 8G</li><li>• Zigbee gateway supporting TUYA</li><li>•8-inch display screen with 800 * 1200 resolution</li><li>• Round screen display, 1.28 inches; Resolution 240 * 240</li><li>• Capacitive touch screen Power mode: AC 90v-240v</li><li>• A set of audio inputs; Output a group</li><li>• 485: Output a set</li><li>• Regularly play music</li><li>• Timing switch on/off</li><li>•Bluetooth: supports connecting Bluetooth phones</li><li>•Installation method: British standard 86 bottom box</li><li>•Product weight: 1.5kg</li><li>•Speaker output power: 1* 2W</li><li>•Speaker output power: 2 * ( 10- 25W ) (digital power amplifier)/analog audio output</li><li>• Switching power: 2gangs less than 200W</li><li>•Product size:297×162×11.5mm</li></ul> |
|  |                                      |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| 6-inch Android Smart control                                                        |                                      | F6-1 | Specification parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|--------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Specifications                                                                      | Music+ Smart Control+Gateway + Scene |      | <p>Bluetooth integrated: It has both Bluetooth transmission and Bluetooth reception functions. (1. Bluetooth transmission: It can search for a Bluetooth speaker through the host's Bluetooth and connect to and play music from the host through the Bluetooth speaker. 2. Bluetooth reception: It can search for the host through the phone's Bluetooth and connect to and play music from the phone through the external speaker.)</p> <ul style="list-style-type: none"><li>• 6-inch IPS display screen, 1440 * 720 resolution, round screen 1.28-inch display screen 240 * 240MM</li><li>• Supports Tuya ZIGBEE gateway</li><li>• 2GB of system memory and 8GB of storage memory</li><li>Android 8.1 system, 4-core processor, CPU:1.5HZ</li><li>• Power supply mode: AC 110-250V</li><li>• Network: WIFI wired network</li><li>• Bluetooth: Bluetooth 2-in-1</li><li>• 485 interface: Supports</li><li>• Light control: 2-channel light control, less than 200W</li><li>Installation method: Single 86 bottom shell</li><li>Product size: 208 × 86 × 11.5MM</li></ul> |
|  |                                      |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |


| 4-inch Smart control |                                                                                                                    | TPP01-EU                                                  | Specification parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2                    | Specifications                                                                                                     | <b>Alexa</b> Voice Control+ Smart Control+Gateway + Scene |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                      |  <p>Smart Voice Control Panel</p> |                                                           | <p>TPP01-EU is a Tuya smart central control panel integrated with Tuya smart home gateway + <b>built-in Alexa voice control</b> (English, Spanish, German &amp; French) + super Zigbee device compatibility + group dimming system.</p> <p>Main Features:</p> <ol style="list-style-type: none"> <li>1. A best alternative of tuya ZigBee gateway at home, 100+ Zigbee sub-devices can be added in.</li> <li>2. 3 Control modes at different distance with 3 themes</li> <li>3. Multimedia interconnection function. Add smart doorbell and smart camera, which will show the screen outside the door when someone rings the bell, contributing a higher level of security to the family.</li> <li>4. Support group wireless dimming lighting. Works with zigbee dimming driver, can realize single light and group lights dimming.</li> </ol> <p>Lighting</p> <ol style="list-style-type: none"> <li>1. Light source (dj) 2. Filament lamp (dsd) 3. Table lamp/floor lamp (td) 4. Nightlight (xyd) 5. Atmosphere lamp (fwd) 6. Light strip (dd) 7. Courtyard lamp (tyd) 8. Solar lamp (tyndj) 9. Induction lamp (gyd) 10. Dimmer (tgq) 11. Lighting driver (zmqd) 12. Commercial lighting driver (syzmqd) 13. Light string (dc) 14. Mining lamp (gkd) 15. Classroom lamp (jsd) 16. Plant growth lamp (zwszd) 17. Ceiling lamp (xdd) 18. Fan lamp (fsd) 19. Panel lamp (mbd) 20. Tube lamp (txd))</li> </ol> <p>Electrician</p> <ol style="list-style-type: none"> <li>21. Switch (kg) 22. Socket (cz) 23. Row plug (pc) 24. Dimming switch (tgkg) 25. Scene switch (cjkg)</li> </ol> <ol style="list-style-type: none"> <li>26. Curtain switch (clkg) 27. Circuit breaker (tdq) 28. Circuit breaker (dlq)</li> </ol> <p>Sensing</p> <ol style="list-style-type: none"> <li>29. Human motion sensor (PIR) 30. Door and window sensor (MCS) 31.</li> </ol> |


| 3.5-inch Smart control |                                                                                     | TPP06                                                                     | Specification parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                      | Specifications                                                                      | <b>Screen+Buttons+ Smart Control+Bluetooth Mesh Gateway + Built-in IR</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                        |  |                                                                           | <p>Matter:Yes, Tuya Farbic devices can be controlled</p> <p>Operating system:OS 6.0 (Based on Linux Kernel)</p> <p>SigMesh 128pcs , 3 Realsys 3 buttons</p> <p>European base (50*52*26mm)</p> <p>Works with Alexa &amp; Works with Google Assistant</p> <p>Supports video camera/doorbell/video lock streaming (no voice)</p> <ol style="list-style-type: none"> <li>1. With screen and buttons, it can directly replace the three-way switch, and the whole family can use it</li> <li>2. With built-in infrared remote control, it can control all 12 types of infrared appliances</li> <li>3. Super strong control ability, supporting more than 110 types of devices and scene control</li> <li>4. With built-in Bluetooth Mesh gateway, it can connect 128 Sigmesh sub-devices</li> <li>5. Support IPC, video doorbell interconnection, support direct remote door unlocking on the screen</li> <li>6. Self-developed Smart Control Panel exclusive operating system OS 6.0, long-term operation without lag</li> </ol> |

# Intercom Solution

Our smart home system consists of smart central control screen gateway, smart lighting system, smart curtain system, background music player, smart control, security system, smart temperature control system and smart door lock system. The system can control home equipment through four ways: smart phone APP, voice control, central control screen control and setting automatic induction control, so as to realize the convenience and fun brought by technology.



| No. | Picture                                                                             | Model                             | Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Compatible devices                                                                                                                                                                                                                                                                                                                                                                   |
|-----|-------------------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   |   | GS-T2E-TPA10-M2A<br>CNUS standard | <p><b>MAX</b> is a Tuya smart central control panel, Zigbee &amp; Bluetooth independent chips, integrate Zigbee and Bluetooth gateway functions, support Bluetooth BLE &amp; BLE mesh Sub-device, and have edge capabilities for localized control.</p> <p>Device control: Fully compatible device access and diversified control forms are compatible with almost all Tuya ecological devices.</p> <p>Scene control: Customs physical buttons, screen interaction, and voice interaction can trigger scenes to meet different needs in life.</p> <p>I-Share technology and T- Control Technology</p> <p>Rich interface: A variety of base forms are supported, the standard base uses zero-fire wire wiring, supports dual relays, RJ45 network port and RS485.</p> <p><b>Specification:</b></p> <ul style="list-style-type: none"> <li>• Color: grey</li> <li>• Operation system: Android 8.1</li> <li>• CPU: (Qualcomm Snapdragon 430)</li> <li>• CPU frequency: 1.5GHz</li> <li>• Main screen size: 10.1 inch</li> <li>• Resolution: (2200*1600)</li> <li>• Material: IP65 (full viewing angle)</li> <li>• Touch screen: Multi touch capacitive screen</li> </ul> <p><b>Packing information:</b></p> <ul style="list-style-type: none"> <li>• Product weight: 0.4kg</li> <li>• Product dimension: 255*155*15mm</li> <li>• Carton weight: 1.1kg</li> <li>• Carton dimension: 342*211*115mm</li> </ul> <p><b>Storage:</b> 128M<br/> <b>Expandable memory:</b> 8-64M<br/> <b>USB:</b> 2.0 interface, can read SD<br/> <b>LAN port:</b> No<br/> <b>WiFi:</b> No<br/> <b>Bluetooth:</b> 4.0</p>                                                                                                                                                                                                                                                                                                                                                                      | <br><br><br>                        |
| 2   |  | S212                              | <p>S212 enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</p> <p><b>Key Features:</b></p> <ol style="list-style-type: none"> <li>1. Powered by PoE or power adapter (DC12V/2A)</li> <li>2. Support IC (13.56MHz) &amp; ID (125kHz) card</li> <li>3. 3 Indicator Lights</li> <li>4. 2 relays supported</li> <li>5. Tamper alarm</li> </ol> <p><b>Physical:</b></p> <ul style="list-style-type: none"> <li>• System: Linux</li> <li>• RAM: 64 MB</li> <li>• ROM: 128 MB</li> <li>• Front Panel: Aluminum</li> <li>• Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>• Standby Power: 1.5 W</li> <li>• Rated Power: 3.5 W</li> <li>• Camera: 2MP, CMOS</li> <li>• Indicator Light: 3</li> <li>• Wiegand Port: Support</li> <li>• Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>• Door Entry: IC (13.56MHz) &amp; ID (125kHz) card</li> <li>• Reset Button: 1</li> <li>• RS485 Port: 1</li> <li>• Relay Out: 2</li> <li>• Input: 2</li> </ul> <p><b>Audio</b></p> <ul style="list-style-type: none"> <li>• Audio Codec: G.711</li> <li>• Echo Cancellation</li> <li>• DTMF: RFC2833</li> <li>• Microphone: Built-in microphone</li> <li>• Speaker: Built-in speaker</li> </ul> <p><b>Video</b></p> <ul style="list-style-type: none"> <li>• Video Codec: H.264</li> <li>• Video Resolution: 1280 x 720</li> <li>• Viewing Angle: 110° (H) / 60° (V) / 125° (D)</li> <li>• Max. Image Transfer Rate: 720p ~ 25fps</li> <li>• Light Compensation: LED white light</li> </ul> <p><b>Networking</b></p> <ul style="list-style-type: none"> <li>• Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</li> </ul> <p><b>Installation:</b> Surface Mounting<br/> <b>Surface Mounting DIM:</b> 168 x 88 x 34 mm<br/> <b>Working Temperature:</b> -40° to +55°<br/> <b>Storage Temperature:</b> -40° to +70°</p> | <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> <li>- DNAKE S212 (Power adapter not included)</li> <li>- Bracket</li> <li>- Screwing Kit</li> <li>- Quick Start Guide</li> </ul> <p>Qty/CTN: 12 pcs<br/> N.W./PCS: 0.71 kg<br/> G.W./CTN: 11.08 kg<br/> Giftbox Size: 215 x 135 x 73 mm<br/> Carton Size: 470 x 235 x 295 mm</p> <p>02.4.0664</p> |
| 3   |  | 280SD-C60S                        | <p>S280SD enables you to make the video call with villa entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices.</p> <p><b>Key Features:</b></p> <ol style="list-style-type: none"> <li>1. Powered by PoE or power adapter (DC12V/2A)</li> <li>2. Support IC (13.56MHz) &amp; ID (125kHz) card</li> <li>3. 3 Indicator Lights</li> <li>4. 2 relays supported</li> <li>5. Tamper alarm</li> </ol> <p><b>Physical:</b></p> <ul style="list-style-type: none"> <li>• System: Linux</li> <li>• RAM: 64 MB</li> <li>• ROM: 128 MB</li> <li>• Front Panel: Aluminum</li> <li>• Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>• Standby Power: 1.5 W</li> <li>• Rated Power: 3.5 W</li> <li>• Camera: 2MP, CMOS</li> <li>• Indicator Light: 3</li> <li>• Wiegand Port: Support</li> <li>• Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>• Door Entry: IC (13.56MHz) &amp; ID (125kHz) card</li> <li>• Reset Button: 1</li> <li>• RS485 Port: 1</li> <li>• Relay Out: 2</li> <li>• Input: 2</li> <li>• IP / IK Rating: IP65 / IK08</li> <li>• Installation: Surface Mounting</li> <li>• Surface Mounting DIM: 168 x 88 x 34 mm</li> <li>• Working Temperature: -40°C to +55°C</li> <li>• Storage Temperature: -40°C to +70°C</li> <li>• Working Humidity: 10% to 90% (non-condensing)</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>Package Features</p> <p>Package Content:</p> <ul style="list-style-type: none"> <li>- DNAKE S280SD (Power adapter not included)</li> <li>- Bracket</li> <li>- Screwing Kit</li> <li>- Quick Start Guide</li> </ul> <p>Qty/CTN: 12 pcs<br/> N.W./PCS: 0.71 kg<br/> G.W./CTN: 11.08 kg<br/> Giftbox Size: 215 x 135 x 73 mm<br/> Carton Size: 470 x 235 x 295 mm</p>                |
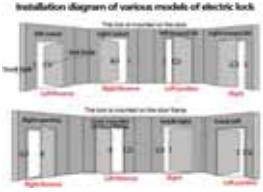
|    |                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4  |  <p>Apartment Machine/Apartment Door station</p>                 | <p>PD06</p> <p>S215 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</p> <p><b>Key Features</b></p> <ul style="list-style-type: none"> <li>*Induction loop for hearing impaired</li> <li>*Braille dot for visually impaired</li> <li>*3 output relays for door locks</li> <li>*Tamper alarm</li> <li>*Support IC (13.56MHz) &amp; ID (125kHz) card, PIN code</li> </ul> <p><b>Physical</b></p> <ul style="list-style-type: none"> <li>•System: Linux</li> <li>•Front Panel: Aluminum</li> <li>•Button: Mechanical</li> <li>•Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>•Standby Power: 1.5 W</li> <li>•Rated Power: 9 W</li> <li>•Camera: 2MP, CMOS</li> <li>•IR Sensor: Support</li> <li>•Wiegand Port: Support</li> <li>•Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>•Door Entry: IC (13.56MHz) &amp; ID (125kHz) card, PIN code</li> </ul> <p><b>Display</b><br/>Display: 4.3-inch TFT LCD</p> <p><b>Audio</b><br/>Audio Codec: G.711<br/>Echo Cancellation<br/>DTMF: RFC2833<br/>Microphone: Built-in microphone</p> <p>•Reset Button: 1<br/>•RS485 Port: 1<br/>•Relay Out: 3<br/>•Input: 4<br/>•IP / I.R. Rating: IP65 / IK08<br/>•Installation: Surface Mounting<br/>•Surface Mounting DIM: 295 x 133 x 42.7 mm<br/>•Working Temperature: -40 to +55<br/>•Storage Temperature: -40 to +70</p> <p><b>Networking</b> : Protocol: ONVIF, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP</p> <p>Video Codec: H.264<br/>Video Resolution: 1280 x 720<br/>Viewing Angle: 110°(H) / 67°(V) / 127°(D)<br/>Max. Image Transfer Rate: 720p ~ 25fps<br/>Light Compensation: LED white light</p> <p><b>Package Features</b><br/>Package Content:<br/>- D-NAKE S215<br/>(Power adapter not included)<br/>- Surface Mounting Box<br/>- Screwing Kit<br/>- Quick Start Guide<br/>Qty/CTN: 10 pcs<br/>N.W./PCS: 1.53 kg<br/>G.W./CTN: 20 kg<br/>Giftbox Size: 362 x 170 x 100 mm<br/>Carton Size: 490 x 420 x 450 mm</p> <p>02.4.0664</p> |
| 5  |  <p>Apartment Machine/Apartment Door station</p>                 | <p>280D-B63F</p> <p>The 280D-B63 enables you to make the video call with apartment entrance door, and open the door remotely from indoor monitor or mobile APP. It also makes an easy integration with SIP devices and lift control system.</p> <p><b>Key Features:</b></p> <ol style="list-style-type: none"> <li>1. Induction loop for hearing impaired</li> <li>2. Braille dot for visually impaired</li> <li>3. 3 output relays for door locks</li> <li>4. Tamper alarm</li> <li>5. Support IC (13.56MHz) &amp; ID (125kHz) card, PIN code, Bluetooth (Optional)</li> </ol> <p><b>Physical</b></p> <ul style="list-style-type: none"> <li>• System: Linux</li> <li>• Front Panel: Aluminum</li> <li>• Button: Mechanical</li> <li>• Power Supply: PoE (802.3af) or DC 12V/2A</li> <li>• Standby Power: 1.5 W</li> <li>• Rated Power: 9 W</li> <li>• Camera: 2MP, CMOS</li> <li>• IR Sensor: Support</li> <li>• Wiegand Port: Support</li> <li>• Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive</li> <li>• Door Entry: IC (13.56MHz) &amp; ID (125kHz) card, PIN code, Bluetooth (Optional)</li> <li>• Reset Button: 1</li> <li>• RS485 Port: 1</li> <li>• Relay Out: 3</li> <li>• Input: 4</li> <li>• IP / I.R. Rating: IP65 / IK08</li> <li>• Installation: Surface Mounting</li> <li>• Surface Mounting DIM: 295 x 133 x 43 mm</li> <li>• Working Temperature: -40°C to +55°C</li> <li>• Storage Temperature: -40°C to +70°C</li> <li>• Working Humidity: 10% to 90% (non-condensing)</li> </ul> <p>Video Codec: H.264<br/>Video Resolution: 1280 x 720<br/>Viewing Angle: 110°(H) / 67°(V) / 127°(D)<br/>Max. Image Transfer Rate: 720p ~ 25fps<br/>Light Compensation: LED white light</p> <p><b>Package Features</b><br/>Package Content:<br/>- D-NAKE S215<br/>(Power adapter not included)<br/>- Surface Mounting Box<br/>- Screwing Kit<br/>- Quick Start Guide<br/>Qty/CTN: 10 pcs<br/>N.W./PCS: 1.53 kg<br/>G.W./CTN: 20 kg<br/>Giftbox Size: 362 x 170 x 100 mm<br/>Carton Size: 490 x 420 x 450 mm</p>                                                                                                        |
| 6  |  <p>Master Machine</p>                                          | <p><b>Property Center Management Machine</b></p> <p>The 902C-A is mainly used in guard station, it enables concierge to send messages, for example: utilities, weather forecast, etc. to apartment residents. It can also manage the access control for visitors, to give you the combined benefit of security and convenience.</p> <p><b>Key Features</b></p> <ul style="list-style-type: none"> <li>10.1-inch capacitive touch screen</li> <li>Android System</li> <li>Alarm/Call logs</li> <li>Message Sending/Receiving</li> <li>Powered by PoE or power adapter(DC12V/2A)</li> <li>Support SIP 2.0 protocol, easy integration with other SIP devices</li> <li>Support monitoring 16 IP cameras</li> </ul> <p><b>Physical</b><br/>System: Android<br/>RAM: 512 MB<br/>ROM: 4 GB<br/>Front Panel: Plastic<br/>Power Supply: PoE(802.3af) or DC 12V/2A<br/>Standby Power: 3 W<br/>Rated Power: 10 W<br/>Camera: 0.3MP, CMOS<br/>SD Card Port: 1<br/>Ethernet Port: 1 x RJ45, 10/100 Mbps adaptive<br/>Installation: Desktop<br/>Dimension: 303x195 x35 mm<br/>Working Temperature: -10°C to +55°C<br/>Storage Temperature: -40°C to +70°C<br/>Working Humidity: 10% to 90%(non-condensing)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 7  |  <p>Smart WiFi video doorbell can be powered by POE switch</p> | <p>KW02</p> <p>Network: 2.4G WIFI 802.11 b/g/n or Wired network<br/>Power adapter: DC 12-36VAC 8-24V or 12-15V or 48V POE<br/>Function: Full duplex talk, Take photo, Take video, Unlock<br/>Unlock: Unlock by remote control, ID Card or APP<br/>External memory: MicroSD card up to 256GB<br/>Resolution: 2 Mega pixels<br/>View angle: 140° Horizontal angle<br/>Night vision: IR CUT no color deviation, B/W night vision<br/>Alarm message: Push picture to APP when motion detection or call<br/>Playback: Video recording after the call or motion detection<br/>Third-Party Services: Amazon echo, Google Home, Cloud storage</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 8  |  <p>1073 type building access control electric lock</p>        | <p>GS-ED1073</p> <p>Specifications:<br/>Double-head left positive; Double-head right positive; Double-head left reverse; Double-head right reverse<br/>size: 130mm*106mm</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 9  |  <p>SY1250</p>                                                 | <p>Input: AC110-240V<br/>Output: DC12V 3A 5A<br/>Time: 0-15S</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 10 |  <p>Two-wire electric lock</p>                                 | <p>GS-LXS-12V</p> <p>1. Working voltage: DC12V;<br/>2. Unlocking method: lock with power on, unlock with power off;<br/>3. Coil operation: continuous operation;<br/>4. Locking delay: adjustable 0-9 seconds delay;<br/>5. Weight: 0.9kg;<br/>6. Current: start 0.8A, working current 0.09A;<br/>7. Lock core: 15.5mm diameter stainless steel lock core, pop-up length 15mm;<br/>8. Suitable door types: glass door, wooden door, metal door, fire door<br/>Note: Glass door has no frame and needs to be matched with electric bolt lock door clamp</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 11 |  <p>GS-CLS-12V</p>                                             | <p>1. Name: 60/180/280kg magnetic lock<br/>2. Voltage: DC12V<br/>3. Current: 500ma<br/>4. Suction: 60/180/280kg linear pull<br/>5. Material: aluminum alloy<br/>6. Unlocking time: &lt;1s<br/>7. Indicator light: LED light<br/>8. Product weight: 2.1kg<br/>9. Signal feedback: normally open and normally closed signal<br/>10. Function: can be used with building intercom and access control system;<br/>11. Suitable for door types: wooden door, iron door, framed glass door</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

# Smart Gateway Series ( Hotel / Home version )

## I ZigBee / Bluetooth Smart Gateway W Series

Smart Device Control Hub

ZigBee Wired Gateway | Bluetooth Wireless Gateway | Multi-mode Wireless Gateway | Bluetooth Dual-mode

Zigbee wired Matter gateway Gateway | Smart Multi-mode Dual-Connect Matter Gateway | S Dual-band wireless multi-mode gateway (2.4G/5G)



Wireless Gateway



Wired Gateway



Wired Gateway(aluminum alloy)



Wired Gateway



Wired/ Matter Gateway



Smart Multi-mode Dual-Connect  
Matter Gateway



### I Smart Ceiling-mounted Gateway

**quickly defines your smart living scenarios.**

It features 360° wide-area coverage. The ceiling-mounted design avoids interference from ground clutter. Its minimalist white casing blends seamlessly with the ceiling. It supports high-voltage power supply and PoE power supply, effectively reducing messy wiring.



### I Zigbee & Bluetooth Dual-mode Gateway

**100Mbps Ethernet Port**

Adopts 2×2 MIMO dual-transmit and dual-receive antenna, with 5dB sensitivity for more stable and flexible connection.

**Longer transmission distance:**

Open space Wi-Fi: 80m, Bluetooth: 150m, Zigbee: 250m. Supports local linkage, cross-network linkage and fault replacement function.



### I 86-Type Gateway

**Flexible installation saves space**

It adopts high-voltage power supply with no need for an external adapter, supporting embedded wall mounting.

Designed for standard 86-type junction boxes, it can directly replace existing wall sockets and blend seamlessly into the home environment.



## EU/UK Standard | H1 Smart Touch Switch Series

Luxury texture, start your smart life journey.

Adopts imported ZSU module and Silicon Labs chip from the USA, delivering stronger signal and more stable connection. Equipped with brand-grade HONGFA relay, with 16A contact switching capacity and electrical durability up to 100,000 times.

### Specifications

- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: Tempered Glass + Aluminum Alloy / PC

- Input Voltage: 100V-240V~
- Dimension: 86mm × 86mm
- Control Mode: Touch control, Voice control, APP control

Certifications:



### Panel Color Options

(Panels and frames below can be freely combined)



Black



White



Grey



Gold

Frame: Aluminum Alloy (Rounded Edge)



Black



Grey



Gold

Frame: Aluminum alloy or plastic optional  
Aluminum alloy frame (straight edge)



Black



Silver



Grey



Gold

Frame: Plastic (Straight Edge)



Black



White



Grey



Gold

# EU/UK Standard H1 Smart Touch Switch Series

Multiple Colors Available




Black



White




Grey

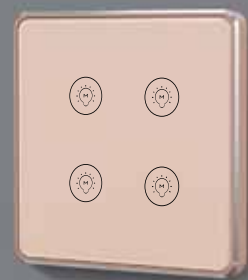

Gold

\*The color in the picture is for reference only, subject to the actual product.




1-Gang Switch  
Black Glass with Black Frame




2-Gang Switch  
White Glass with Silver Frame




3-Gang Switch  
Grey Glass with Grey Frame




4-Gang Switch  
Gold Glass with Gold Frame




1-Gang Switch  
Black Glass Right Angle Edge



2-Gang Switch  
White Glass, Right Angle Edge



3-Gang Switch  
Grey Glass, Right Angle Edge



4-Gang Switch  
Gold Glass, Right Angle Edge



Curtain Switch  
Black Glass with Gold Frame



Curtain Switch  
Black Glass with Gold Frame



Water Heater Switch  
Grey Glass with Gold Frame



Ceiling Fan Switch  
Gold Glass with Gold Frame



## EU & China Standard Smart PushButton

M2 Series (PC) / M3 Series (Glass) / H2 Series (PC Button) / H3 Series (Glass Button)

Adopts imported ZSU module and Silicon Labs chip from the USA, featuring stronger signal and more stable connection. Equipped with high-grade HONGFA relay, it supports 16A contact switching capacity with an electrical durability of up to 100,000 operations.

### Specifications

- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: Tempered Glass + Aluminum Alloy / PC
- Input Voltage: 100V~240V~
- Dimension: 86mm × 86mm
- Control Mode: Touch control, Voice control, APP control

Certifications:



### Panel Color Options



Black



White



Grey



Gold



1-Gang Switch  
Black




2-Gang Switch  
White




3-Gang Switch  
Grey




4-Gang Switch  
Gold




1-Gang 1-Scene Switch  
Black



2-Gang 2-Scene Switch  
White



3-Gang 2-Scene Switch  
Grey



4-Scene Switch  
Gold



## EU & CN Standard Socket Series



10A Socket  
Black Glass with Black Frame



16A Socket  
White Glass



10A Socket with Dual USB  
Grey Glass



16A Socket  
Gold Glass with Gold Frame




EU Standard Socket  
Black Glass with Black Frame



EU Standard Socket  
White Glass with Silver Frame



EU Standard Socket  
Grey Glass, Right Angle Straight Edge



EU Standard Socket  
Gold Glass, Right Angle Straight Edge



Universal socket  
with USB



EU Standard Socket  
with USB



Universal socket  
5-Pin Socket



UK Standard  
3-Pin Socket



## M7 Offline Voice Switch (4inch/5inch Screen)

Offline Voice Control | 4-inch HD Touch Screen | Smart Infrared Induction | Multiple Protection | 12-Scene Control



Offline but constantly connected scene control with a single command



4-inch  
HD Touch Screen



Smart Infrared  
Human Detection



2-Channel Gang,  
Multi-Scene Control

### Specifications

- Power: Capacitive Load 400W per gang, Resistive Load 800W Per gang
- Wireless Protocol: Zigbee 2.4GHz
- LCD Screen: 4-inch, Resolution 480\*480
- Input Voltage: 100V~240V~
- Dimensions: 86mm × 86mm
- Control Mode: Touch Control, Offline Voice Control, APP Control
- Infrared: Frequency 38K, Infrared angle 120° front side

Certifications:





# EU-standard Curved Glass Smart Switch

Luxury texture, start your smart life journey.

Adopts imported ZSU module and Silicon Labs chip from the USA, delivering stronger signal and more stable connection. Equipped with brand-grade HONGFA relay, with 16A contact switching capacity and electrical durability up to 100,000 times.

## Specifications


- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: Tempered Glass
- Input Voltage: 100V–240V~
- Dimension: 86mm × 86mm
- Control Mode: Touch control, Voice control, APP control

Certifications:



## Panel Color Options

(Panels and frames below can be freely combined)

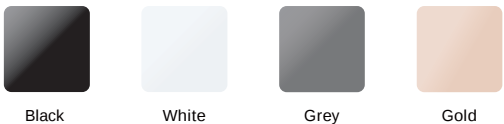

Frame: Aluminum alloy





# US-Standard Curved Glass Smart Switch

AG+AF glass、Luxury texture, start your smart life journey.

Adopts imported ZSU module and Silicon Labs chip from the USA, delivering stronger signal and more stable connection. Equipped with brand-grade HONGFA relay, with 16A contact switching capacity and electrical durability up to 100,000 times.

## Specifications

- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: AG+AF Tempered Glass
- Input Voltage: 100V-240V~
- Dimension: 120mm × 72mm
- Control Mode: Touch control, Voice control, APP control

## Panel Color Options

(Panels and frames below can be freely combined)



Black



White



Grey



Gold

Frame: Aluminum alloy



Black



Grey



Gold

# 147 Series Curved glass Switches



1-Gang Switch  
Grey Glass with Grey Frame




2-Gang Switch  
Grey Glass with Grey Frame




3-Gang Switch  
Grey Glass with Grey Frame



3-Gang Switch  
Grey Glass with Grey Frame

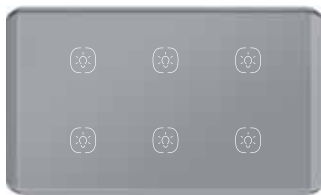

6-Gang Switch  
Grey Glass with Grey Frame

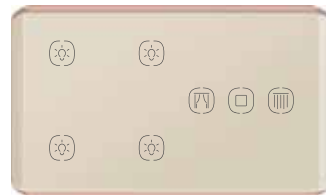


4-Gang Switch&Curtain Switch  
Grey Glass with Grey Frame




4-Gang Switch&Curtain Switch  
Grey Glass with Grey Frame




4-Gang Switch&Universal Power Socket  
Grey Glass with Grey Frame

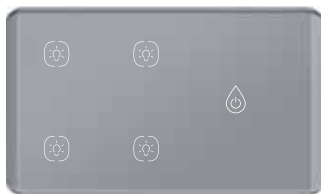


6-Gang Switch&Water Heater Switch  
Grey Glass with Grey Frame

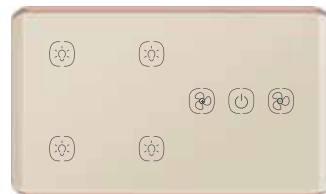

4-Gang Switch&Fan Switch  
Grey Glass with Grey Frame

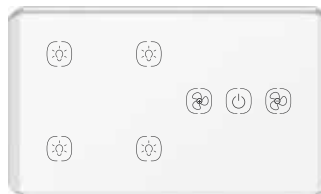

4-Gang Switch&Fan Switch  
Grey Glass with Grey Frame

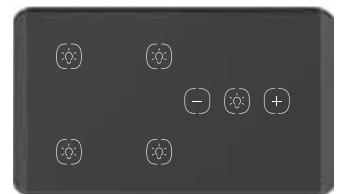

4-Gang Switch&Dimmer switch  
Grey Glass with Grey Frame

# US-Spec Curved glass Smart Switch



1-Gang Switch



2-Gang Switch



3-Gang Switch



4-Gang Switch



6-Gang Switch



8-Gang Switch



## Brazilian Standard Smart Socket

(Material: Glass)

Aluminum Alloy Frame



White

Black

Grey

Gold

Right Angle Frame



White

Black

Grey

Gold

## Australian Standard Smart Socket

(Material: Glass)

Aluminum Alloy Frame



White

Black

Grey

Gold

Right Angle Frame



White

Black

Grey

Gold



## US Standard Smart Button Switch

S2 - PC Button | S3 - Glass Button | S4 - Aluminum Alloy Button



Black Glass 1-Gang



Black Glass 2-Gang



Black Glass 3-Gang



Black Glass 4-Gang



Black Glass 6-Gang



Gold Glass 1-Gang



Gold Glass 2-Gang



Gold Glass 3-Gang



Gold Glass 4-Gang




Gold Glass 6-Gang

Panel color  
optional



Black



White



Grey



Gold



# US Standard Smart Touch Switch

## S1 Series (Glass Touch)

Adopts imported ZSU module and American SILICONLABS chip, delivering stronger signal and more stable connection. Equipped with brand-grade HONGFA relay with 16A contact switching capacity, supporting an electrical durability of up to 100,000 operations.

### Specifications

- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: Tempered Glass + Aluminum Alloy / PC
- Input Voltage: 100V-240V~
- Dimension: 120mm × 72mm
- Control Mode: Touch control, Voice control, APP control

Certifications:



### Panel Color Options

(Panels and frames below can be freely combined)



Black



White



Grey



Gold

Frame: Aluminum Alloy (Rounded Edge)



Black



Grey



Gold

Frame: Aluminum alloy or plastic optional  
Aluminum alloy frame (straight edge)



Black



White



Grey



Gold

Frame: Plastic (Straight Edge)



Black



White



Grey



Gold



1-Gang Switch  
Black glass with black frame



2-Gang Switch  
White glass with silver frame



3-Gang Switch  
Grey glass with grey frame



4-Gang Switch  
Gold glass with gold frame



10A Dual Socket  
Black glass with black frame



1-Gang Switch  
Black



2-Gang Switch  
White



3-Gang Switch  
Grey



4-Gang Switch  
Gold



Non-smart US Standard  
Dual Socket Alloy Frame  
with White Glass



1-Gang Switch Concave black  
glass with gold frame



2-Gang Switch Concave white  
glass with gold frame



3-Gang Switch Concave grey  
glass with gold frame



4-Gang Switch Concave gold  
glass with gold frame



Rolling Shutter Switch Gold  
glass with gold frame



Power Outlet  
Grey



Dual USB Socket  
Black



Non-smart US Standard Dual Socket with A+C Port  
Aluminum Alloy Frame, White Glass



Water Heater Switch  
Gold Glass with Silver Frame



Curtain Switch  
White Glass with Silver Frame



## JD3 Smart Display Switch

Multiple switching modes, customizable button labels, smart dimming and color tuning, AG-coated glass, selectable and customizable icons, built-in weather and time display A wide variety of styles that can be mixed and matched.

### Specifications

- Power: 800W per gang
- Wireless Protocol: WiFi / Zigbee 2.4GHz
- Panel Material: Tempered Glass + Aluminum Alloy / PC
- Input Voltage: 100V-240V~
- Dimension: 86mm × 86mm
- Control Mode: Touch control, Voice control, APP control

### Panel Color Options

(Panels and frames below can be freely combined)





White



Grey



Gold

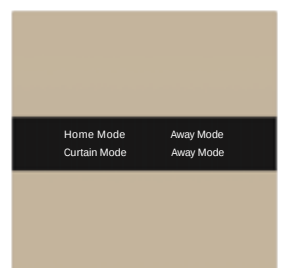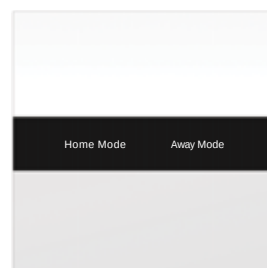



## Smart Desktop Rotary Switch ( 1.8inch/2.1inch )

Wireless design for flexible placement, 360° rotation with a smooth, lightweight feel, knob-controlled dimming and color adjustment, offline voice control, high-definition touchscreen, smart infrared sensing, aluminum alloy body.

### Specifications

- Input Voltage: DC5V/1A
- Standby power consumption: 2W
- Wireless Protocol: Zigbee 2.4GHz
- LCD Screen: 1.8-inch/ Resolution 360\*360; 2.1-inch/Resolution 240\*240
- Dimensions: 1.8-inch/Φ80mm × 100mm; 2.1-inch/Φ80mm × 108mm
- Control Mode: Touch Control, Offline Voice Control, Knob control, APP Control
- Infrared: Frequency 38K, Infrared angle 120° front side

### Product Colors



Silver



Gray



Gold



## M7 Smart Knob Dimmer (Wall-mounted)

- 1.28-inch knob control
- humanized lighting experience,
- delivers comfortable light ambiance.

Smart connectivity, ultra-smooth dimming and color tuning with 10000-level precision, one-touch scene switching. Supports richer local modes, upgraded smart chip, stable control with no disconnection.

### Specifications

Power Rating: 110V capacitive load 200W per circuit; capacitive load 400W per circuit;  
220V capacitive load 400W per circuit; capacitive load 800W per circuit

Input Voltage: 100V–240V~

Dimensions: 86mm × 86mm

Wireless Protocol: Bluetooth / Zigbee, 2.4GHz

Control Mode: Touch control, Voice control, APP control



Light brightness  
adjustment



Light color temperature  
adjustment

### Optional Panel Colors



Titanium White



Mica Black



Deep Space Gray



# M7 Smart Knob Thermostat (Wall-mounted)

- 1.28-inch knob control • Mobile APP remote control
- Smart home scene linkage

Smart connectivity, ultra-smooth precise temperature adjustment with 10000-level stepless control, one-touch scene switching. Supports multiple local modes, upgraded intelligent chip, stable connection without disconnection.

## Specifications

Power Rating::110V capacitive load 200W per circuit; capacitive load 400W per circuit;  
220V capacitive load 400W per circuit; capacitive load 800W per circuit

Input Voltage: 100V-240V~

Wireless Protocol: Bluetooth / Zigbee, 2.4GHz

Dimensions: 86mm × 86mm

Control Modes: Touch control, Voice control, APP control



Air Conditioner



Floor Heating



Fresh Air System

## Optional Panel Colors



Titanium White



Mica Black



Deep Space Gray



## JD1 Push Button Series (Neutral / No Neutral )

provides multi-scene application solutions for hotels and smart

- Tuya Hotel SaaS system, no room equipment point fee required; supports local distributed Zigbee and Bluetooth,
- flexible collocation with various combinations, and delivers multi-scene application solutions.

Material: PC / Glass / Aluminum Alloy





## JD1 Push Button Series

Multiple color options available (Time Grey, Black, White, Gold), freely combinable in various styles.





## JD5 Button Series

Provides multi-scene application solutions for hotels and smart homes:

Tuya Hotel SaaS system with no room device point fees, supports local distributed Zigbee and Bluetooth. We provide one-stop OEM/ODM services to build full-scene smart hotels.

Material: PC / Glass / Aluminum Alloy



# Other Series Products

## I Bluetooth / Zigbee / 433RF Self-adhesive Remote Control Switch

No placement restrictions: can be used through walls, pasted on walls, or held in hand. Place it anywhere convenient.

- Wireless control
- Easy installation
- Wall-penetrating remote control
- Single control to multi-control conversion



Touch Version



Button Version

## I Smart Mini Plug Series



10A / 5-Pin



US Standard 10A



16A Air Conditioner Socket




16A / 3-Pin

## I Xiaozhi Butler & Xiaozhi Speaker Series



Voice Infrared



Scene Control



Voice Linkage



Voice Control

## I Dual-color Temperature Dimming & Color Tuning Driver Power Supply

- Soft start gradual brightness function
- Over-temperature, overload and short circuit protection
- Voice control
- Multi-current & wide voltage design

Output Power: 20W/30W/40W/7W/9W/12W



**Smart DMD2B2-C Controller**

7-12W driver power supply  
Dimming range: 1-100%、1-1000%



**Smart RGCW Controller**

RGCW Driver Power Supply  
Dimming Range: 1-1000%



**Smart DMD2D2 Controller**

20W driver power supply  
Dimming range: 1-100%、1-1000%

## I 1-4 Gang Switch Module

Mobile phone remote control | Supports timed on/off | Supports scene linkage | Supports voice control

Input Voltage: 100V-240VAC      Protocol: Zigbee 3.0  
Operating Frequency: 2.4-2.484GHz, IEEE 802.15.1  
Operating Range: 200m      Specifications: 1/2/3/4



## I Dual Color Temperature Dimmable Wall Washer Light

Matte deep cup design, effectively anti-glare and eye-friendly  
Skin-feel paint finish, delicate and silky texture  
Excellent heat dissipation performance with long service life

Input Voltage: 170V-240VAC  
Beam Angle: 15°, 24°, 36°  
Light Source Type: OCB

Output Power: 12W/15W  
Color Temperature: Dual color temperature



Kazi Wall Washer Light




Ultra-thin Wall Washer Light




Lafa Wall Washer Light

# Smart Home Security Series

Sensitive response | Accurate detection | Mobile remote control

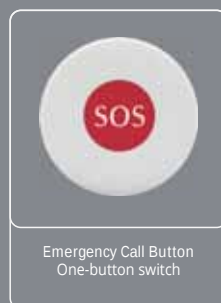

# ICON SET

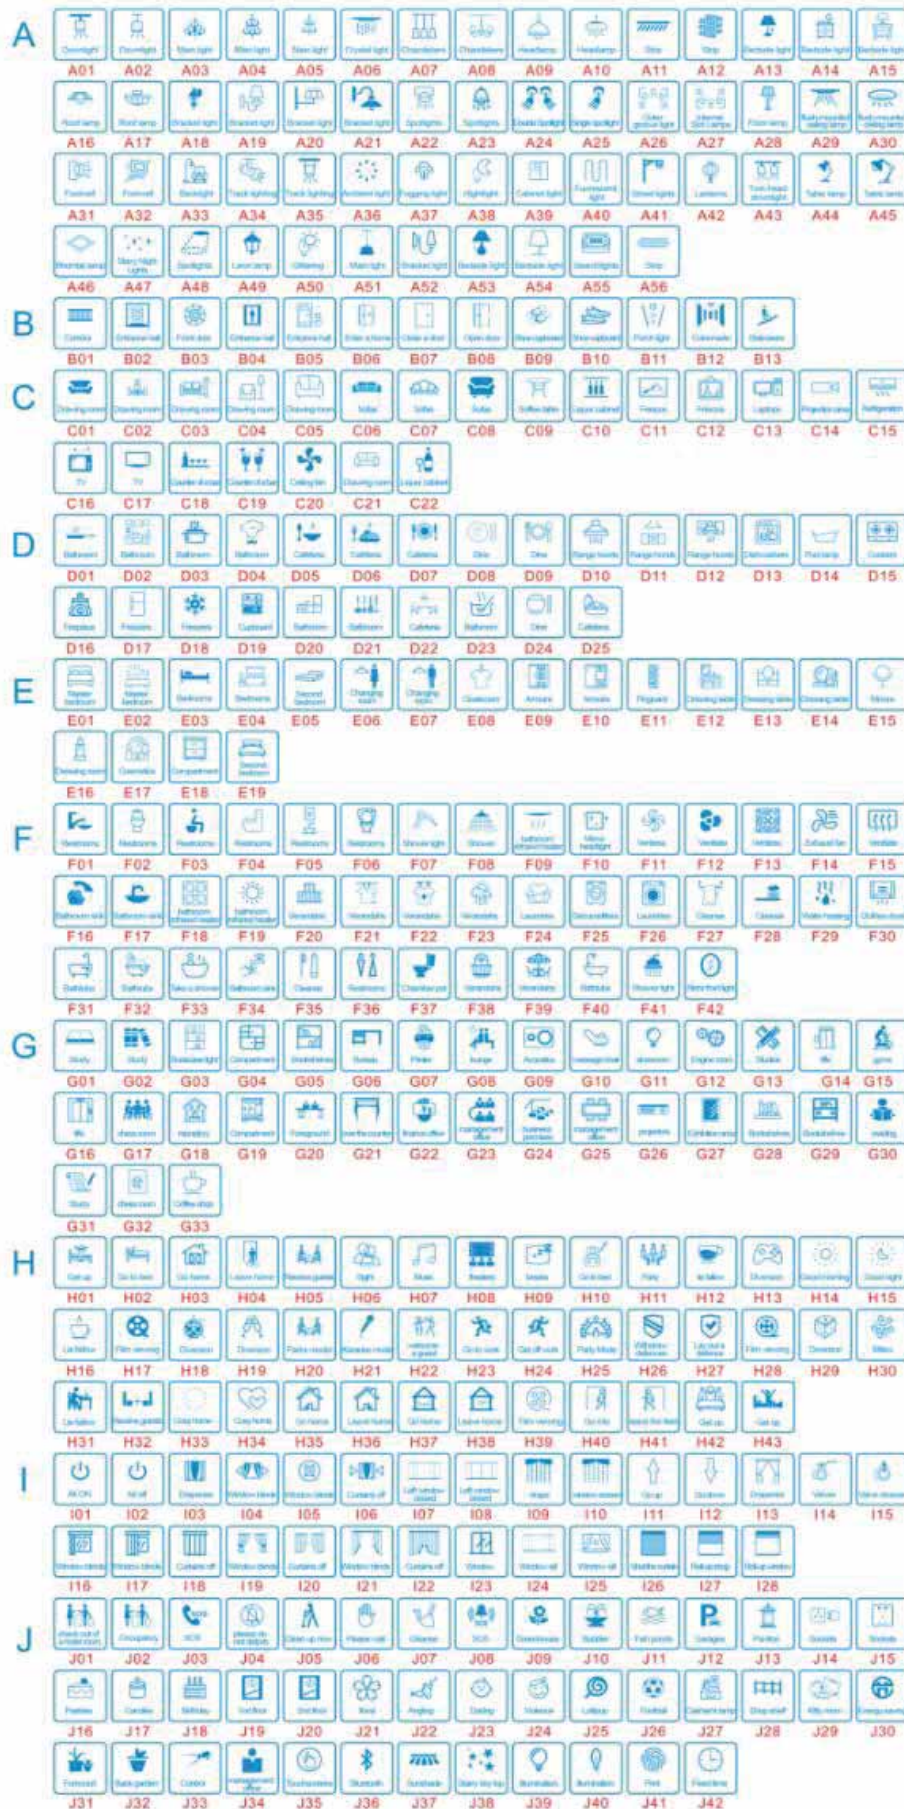

# StayOS by LOCCA

## LOCCA OTEL EKIPMANLRI TUR.SAN.TIC.A.S.

📍 Add: **Levent Mah. Karanfil Sok. No:13**  
**Besiktas-ISTANBUL-TURKIYE**

✉ E-mail: **Info@otelsistem.com**

☎ Tel: **+90549.680 8526**

🌐 Website: **www.otelsistem.com**

